



Standard Features


- HSS Structural Tubing Frame, Floor, Wall, Roof
- Cambered Radius Roof Bows
- Aluminum Extrusion Trim Top And Bottom
- Screwless VHB Bonded Painted Aluminum Exterior Panels
- Fully Enclosed Wiring
- Led Exterior And Interior Lights
- One-Piece Aluminum Roof
- 4' Aluminum Barlocks
- Side Vent
- Zinc Coated Hardware

Specifications

Axle:	(1) 3,500 lb. Lippert Spring	Crossmembers:	Steel HSS 2.0" X 2.0"
Brakes:	None	Floor:	3/4" Plywood
Coupler:	10,000 lb. Stamped	Walls:	3/8" Plywood
Jack:	2,000 lb. Top-Wind Bolted	Wheels:	205/75R14 C Steel
Side Door:	36"x60", 66" or 72" with RV Latch	Electric Plug:	4 Wire
Floor D-Rings:	None	Ramp Rating:	800 lb. Midspan
Main Rails:	Steel HSS 3.0" X 2.0"		

Options

Rear Door	
Ramp	Barn Style

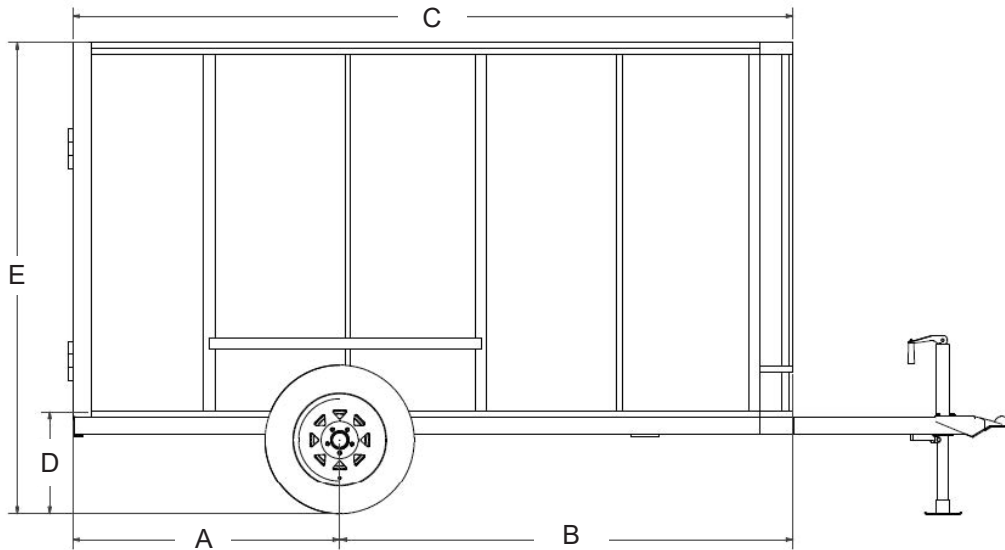

Dimensions

Model	A	B	C	D	E
LCHS29-510F-64	47"	80"	127"	17 5/16"	84 5/16"
LCHS29-612F-72	57"	94"	151"	17 5/16"	92 5/16"
LCHS29-512V-64	47"	98"	145"	17 5/16"	84 5/16"
LCHS29-614V-72	57"	112"	169"	17 5/16"	92 5/16"
LCHS29-614V-78	57"	112"	169"	17 5/16"	98 5/16"

Model	Rear Door Entrance	Space Between Fenders
LCHS29-510F-64	48 1/8"W X 59 11/16"H	57 1/4"
LCHS29-612F-72	60 1/8"W X 66 7/16" H	69 1/4"
LCHS29-512V-64	48 1/8"W X 59 11/16"H	57 1/4"
LCHS29-614V-72	60 1/8"W X 66 7/16" H	69 1/4"
LCHS29-614V-78	60 1/8"W X 72 7/16" H	69 1/4"

Model	Description	Net Weight	GVWR	Payload Cap.
LCHS29-510F-64	5' x 10' x 64" wall height, 2,900 lb. Single Axle Flat Nose	1,009 lb.	2,900 lb.	1,891 lb.
LCHS29-612F-72	6' x 12' x 72" wall height, 2,900 lb. Single Axle Flat Nose	1,229 lb.	2,900 lb.	1,671 lb.
LCHS29-512V-64	5' x 12' x 64" wall height, 2,900 lb. Single Axle V-Nose	1,075 lb.	2,900 lb.	1,825 lb.
LCHS29-614V-72	6' x 14' x 72" wall height, 2,900 lb. Single Axle V-Nose	1,317 lb.	2,900 lb.	1,583 lb.
LCHS29-614V-78	6' x 14' x 78" wall height, 2,900 lb. Single Axle V-Nose	1,381 lb.	2,900 lb.	1,519 lb.



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised June 2025